



Specs: 26.03Specs20

Waterproofing Compressed Fibro & Blue Board

Products required

- **MAXJOINT ELASTIC**
- **MAXSEAL FLEX**
- **MAXMESH**

Method

1. Prepare area to be treated by removing any loose materials ensuring a clean and sound surface. If surface previously painted all paint must be removed.
2. Joints between sheets must be filled with **MAXJOINT ELASTIC** Coat entire surface with **MAXSEAL FLEX**, according to product specifications.
3. The **MAXSEAL FLEX** coating should be reinforced with **MAXMESH** on all joints. **MAXMESH** is a fibreglass mesh that will strengthen and reinforce the **MAXSEAL FLEX**. **MAXMESH** is incorporated into the first coat of **MAXSEAL FLEX**.
4. Leave overnight between coats.
5. Apply second coat of **MAXSEAL FLEX**, according to product specifications.
6. Leave for 3-5 days prior to applying finish coat.

APPROVED BY JAMES HARDIE

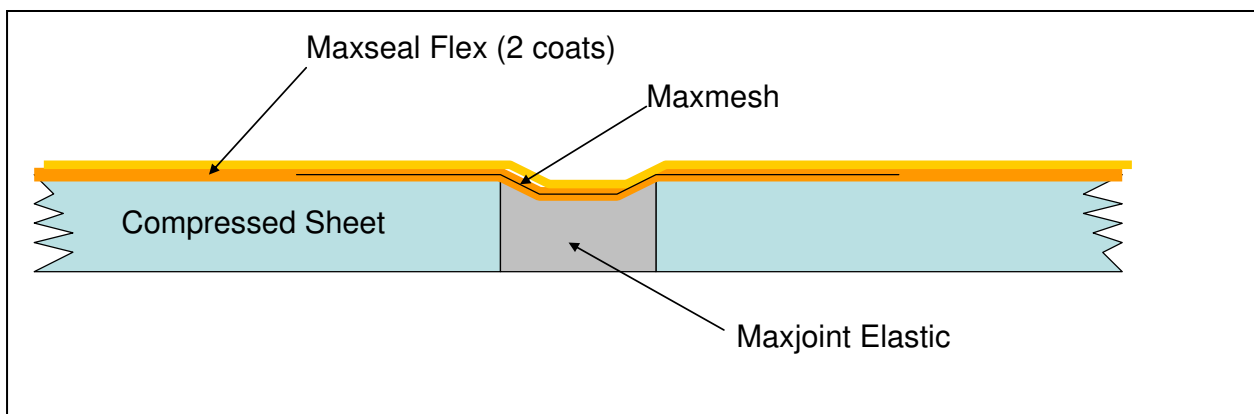


Figure: Shows the **MAXJOINT ELASTIC** to fill void between sheets. The **MAXSEAL FLEX** coating with **MAXMESH** reinforcing over the joint area.

